

Wallbox – WiFi Function Manual





Content

1. The APP	3
2. Connection	4
2.1 WiFi-Setting Mode	4
3. Functions	6
3.1 Selection of the EV Charger	6
3.2 Details for the EV Charging Station	7
3.3 The Charging Procedure	8
4. Time Schedule Setting	9
5. IC-Card Management System	15
6. Charger Status	18
7. Settings	20
8. Firmware Upgrade	21
9. Router Connection	21
10. Bind Device	22

1. The APP

You can find the APP “**Duosida Charger**” in your App- or Play-Store.

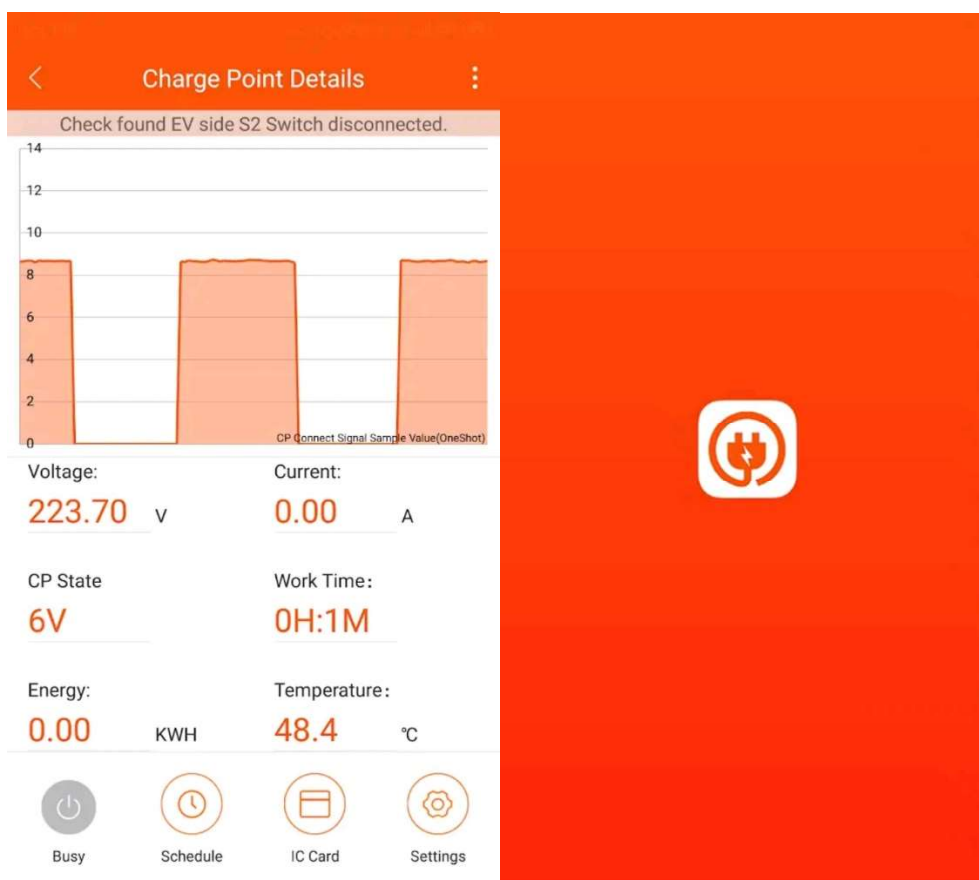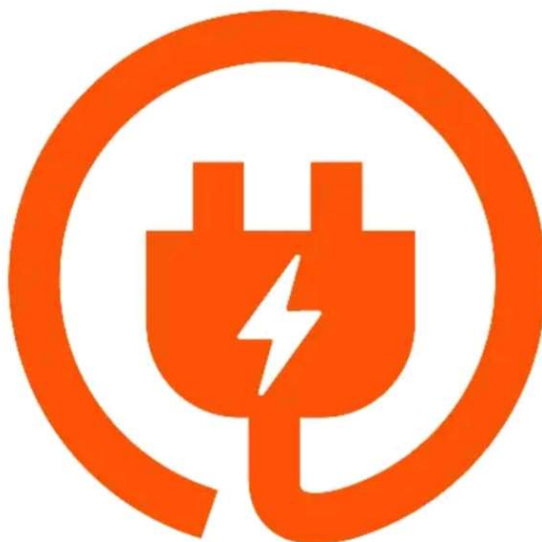

2. Connection

After installing the APP, please turn on the EV Charger.




*1: After the charger is turned on, the circular indicator light and the arc indicator light turn red. At this time, the charger needs to be unlocked with the mobile phone APP.

2.1 WiFi-Setting Mode

2.1.1 IC-Karte


Use the IC-Card to get into the WiFi-Setting Mode.

Please power on again and enter WiFi Configuration Mode in 2 minutes.

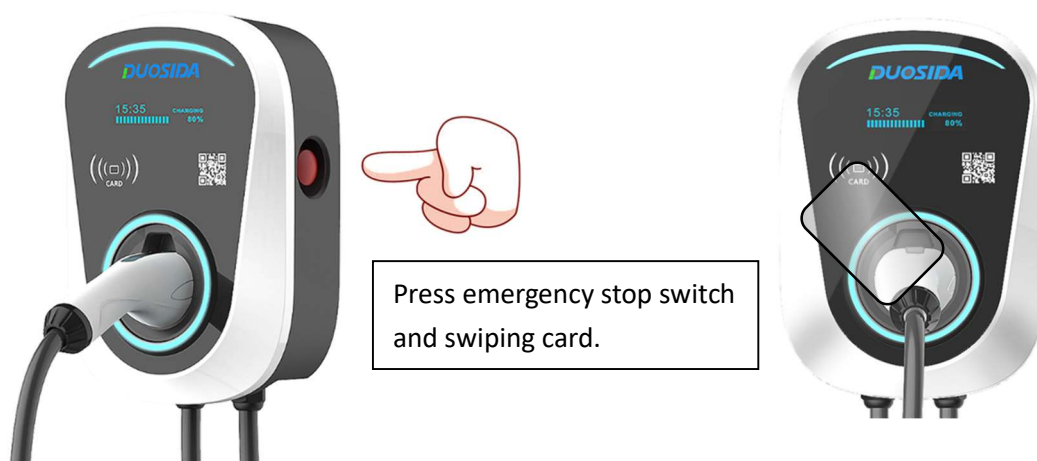


2.1.2 Emergency Stop Switch

Or use the emergency stop switch to enter WiFi configuration mode.

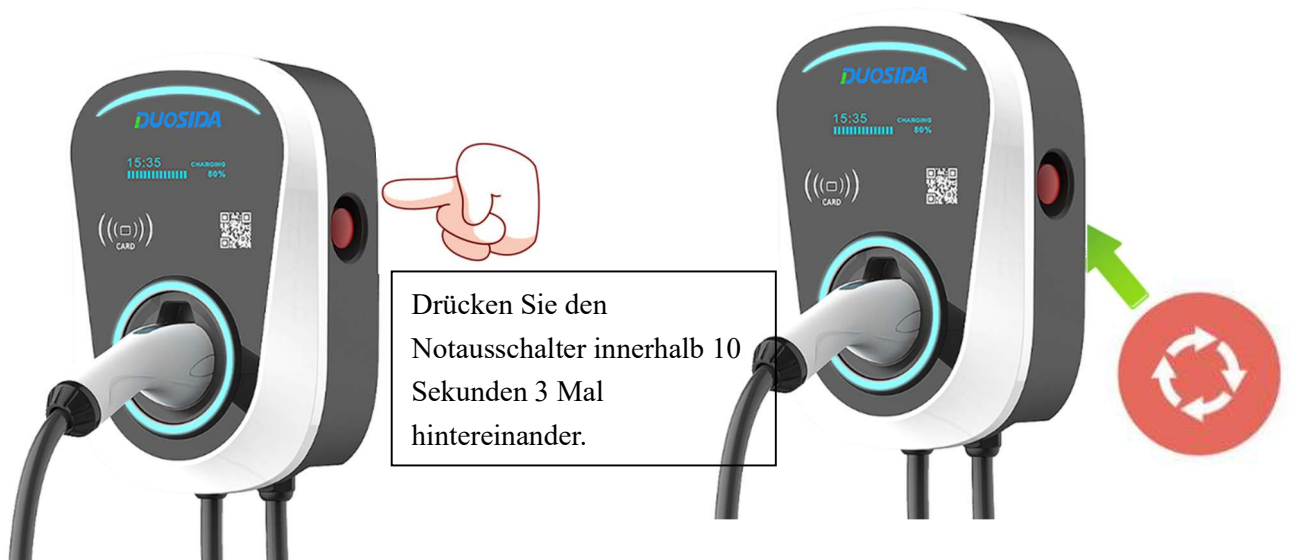

Use your smart phone to connect the charger's WiFi

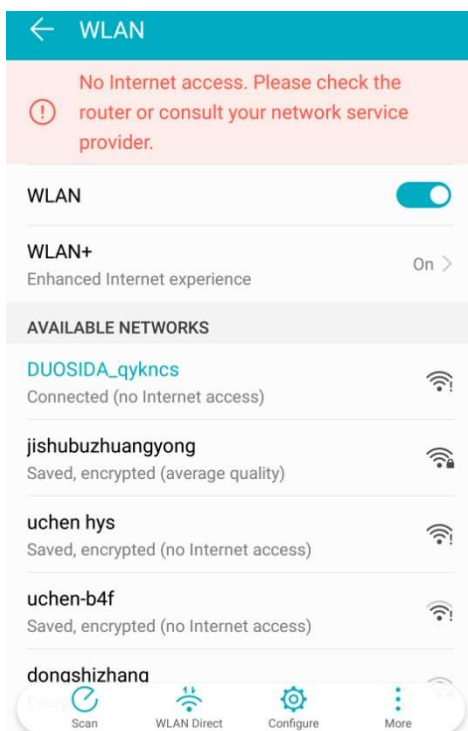

Find the network of DUOSIDA_XXXX,
enter the password: duosida@cp

Note: After being connected to the WiFi network of the charger, the mobile phone may prompt that it cannot connect to the Internet and keep the current connection.

3. Functions

3.1 Selection of the EV Charger

Charge Points

ChargePoint Local(10000115)

Type:DUOSIDA Mode3@32A Firmware:V1.0.0.645,ocpp1.6,oled,rfid,wifi,private
Net Status:Online Work Status:Available

Click the screen to scroll down and refresh until the list of charge points appears. After successful activation, the circular and arc indicators of the charge point will turn blue.

*2: If red appears here, please scroll down again to refresh.

Charge Points

ChargePoint Local(10000115)

Type:DUOSIDA Mode3@32A Firmware:V1.0.0.645,ocpp1.6,oled,rfid,wifi,private
Net Status:Online Work Status:Available

Click on the ChargePoint to get into the ChargePoint details.

Charge Point Details

Voltage:	233.20 V	Current:	0.00 A
CP State	Idle(12V)	Work Time :	0
Energy:	0.00 KWH	Temperature :	42.3 °C


Start

Schedule

IC Card

Settings

3.2 Details for the EV Charging Station

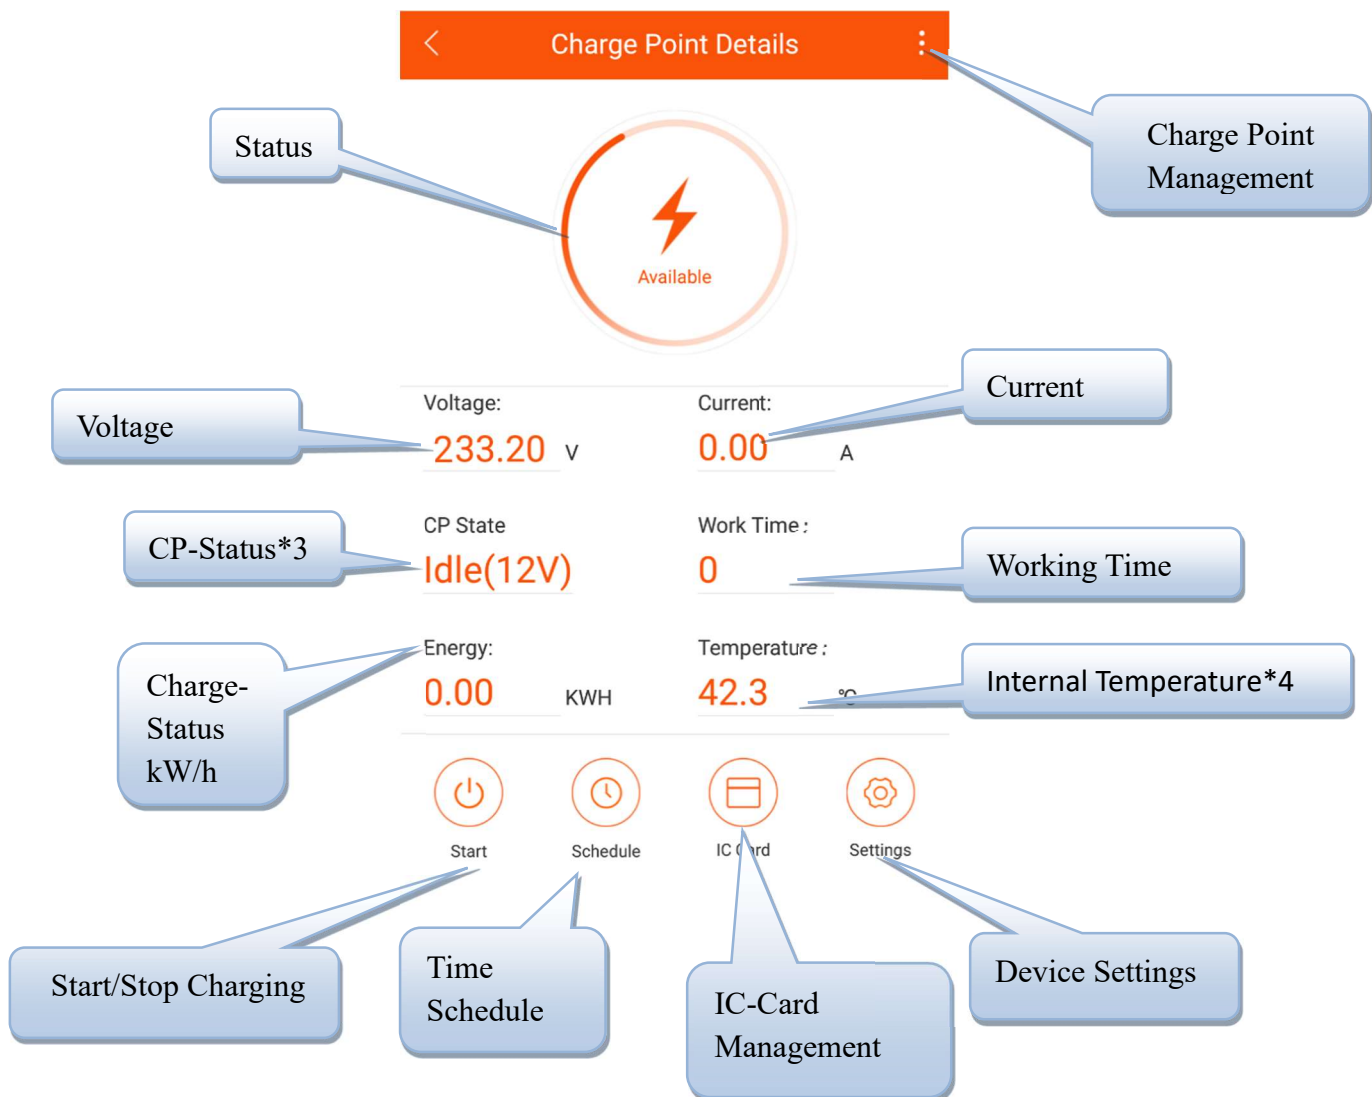


*3: Idle is for standby status, 9V is for prepare charging, and 6V PWM is for charging status.

*4: This temperature is for the internal chip temperature, it is around 15 °C higher than the internal environment.

3.3 The Charging Procedure

1. Plug the charging plug into the electric vehicle charging socket.
2. Use the APP to enter the charging details page, and click the start charging button or use the IC card to start charging.

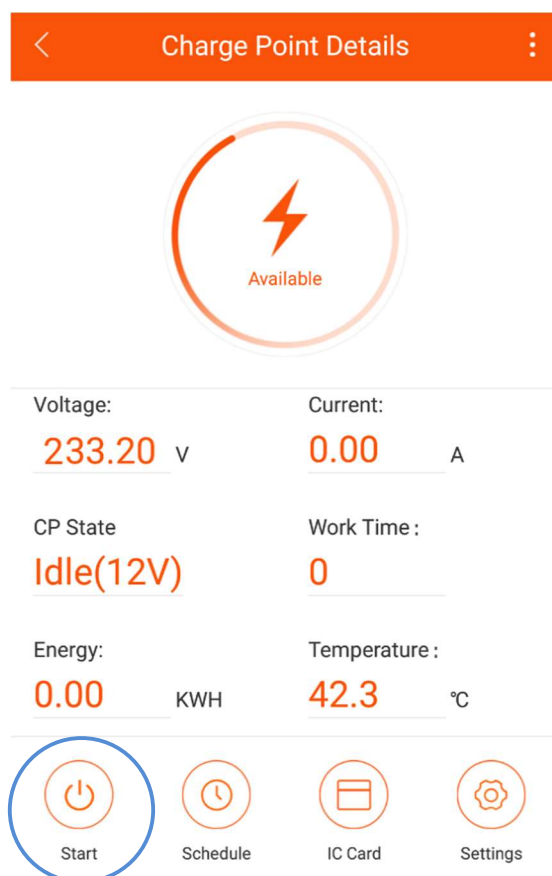

3. Click the stop charge button in the APP or use IC to stop charging.

Note: If you use the APP to start charging, then you need to click the stop button in the APP when you want to stop charging (the EV will automatically stop when it is fully charged), and you must use the IC card to stop charging when you start charging by IC.

4. Time Schedule Setting

Schedule

Recurring
Priority: 1

Sat, Aug 11, 2018 09:27 AM

Sun, Aug 26, 2018 09:27 AM

Delete

Add New Schedule Profiles

Schedule Setting
Submit

Absolute
Relative
Recurring

Start Time
Sat, Aug 11, 2018 09:29 AM

End Time
Sat, Aug 11, 2018 09:29 AM

Priority Setting
0

+

There are three types of time schedules possible:

1. Absolute
2. Relative
3. Recurring

1. Absolute:

During the time period of the task, the EV Charger performs the charging according to the set time point.

Example:

4. Send the time schedule to the ChargePoint.

1. Set the task start time.


2. Set the task end time.

Priority: The smaller the number, the higher the priority task.

3. Click the “+” to add the schedule for charge. Current can set the MAX charging current. If write “0” it will stop charge during this time, to write “1” is bypass (the schedule does not to manage charge point during this time).


5. Click the Start Button to enable the task.

Clicking on the start time will affect the actual charging chart.

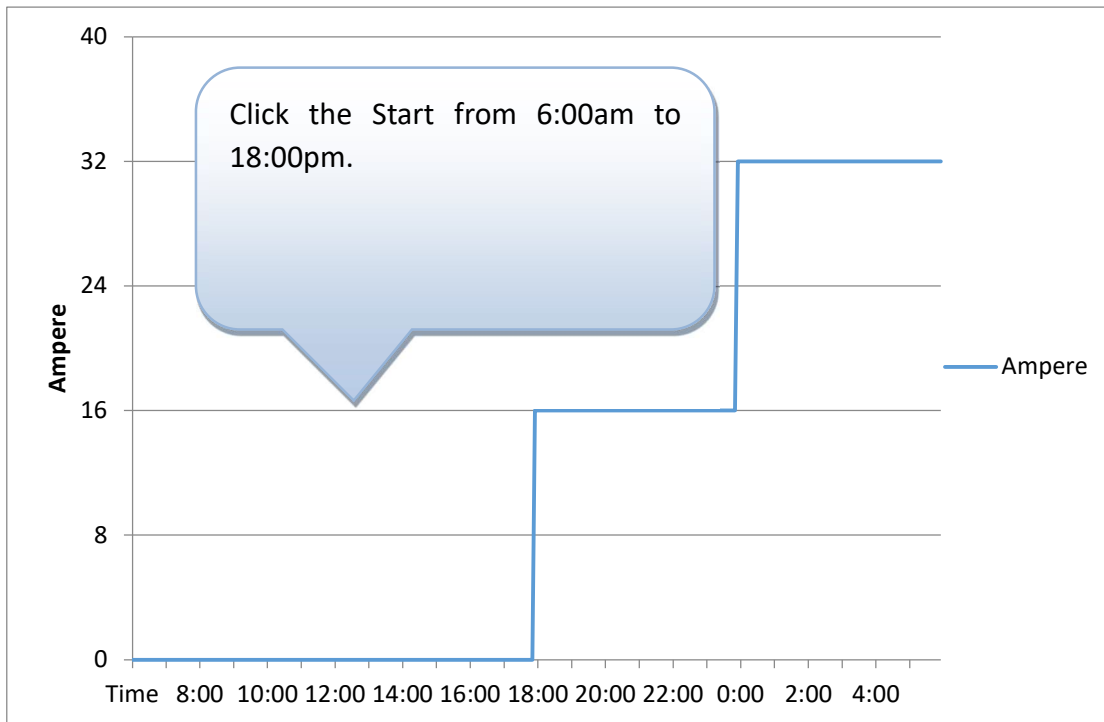

The task activated between start time and end time only.

If you click the Start at 4:00AM, the charger will work at default 32A.

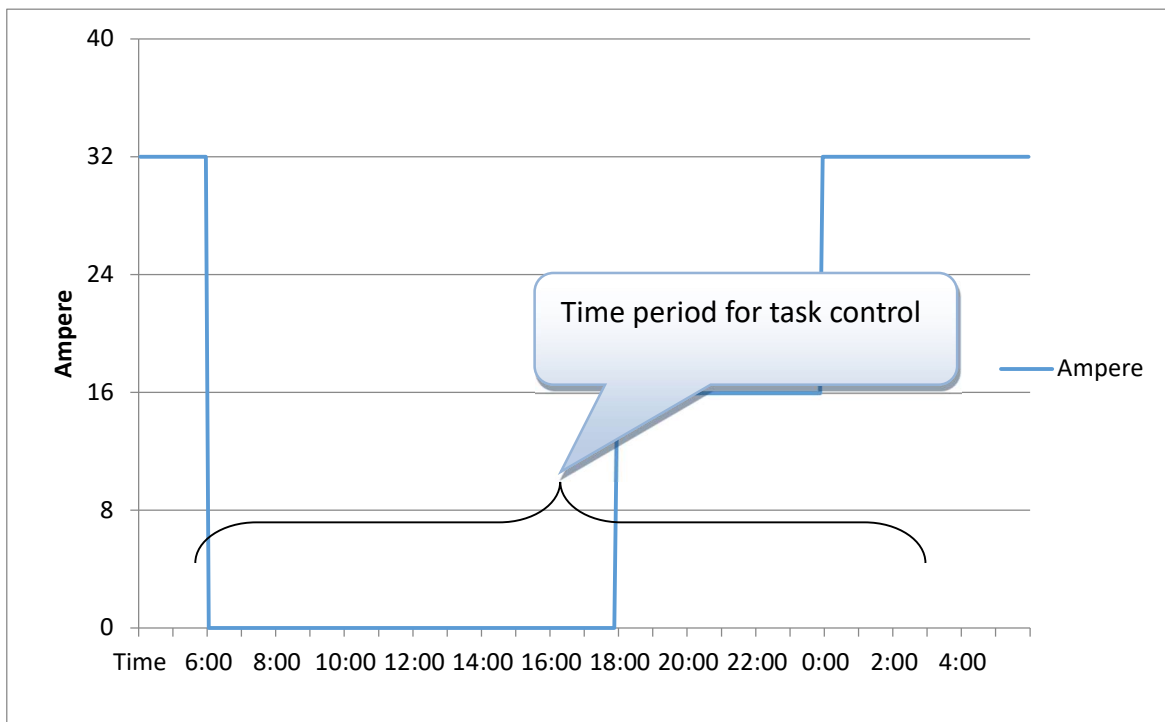

2. Relative

The charging chart is based from start time of charging session.

Example:

<
Schedule Setting
Submit

→
Relative
↔
Absolute
Recurring

Start Time
Tue, Oct 23, 2018 06:00 AM


End Time
Wed, Oct 24, 2018 06:00 AM


Priority Setting
5 >

At Transaction Start
>

At Start	Close >
12Hour Later	16.0A >
18Hour Later	32.0A >

This part setting same to example “absolute”.
“12Hour Later” and “18hour Later” is the time from when you click Start.

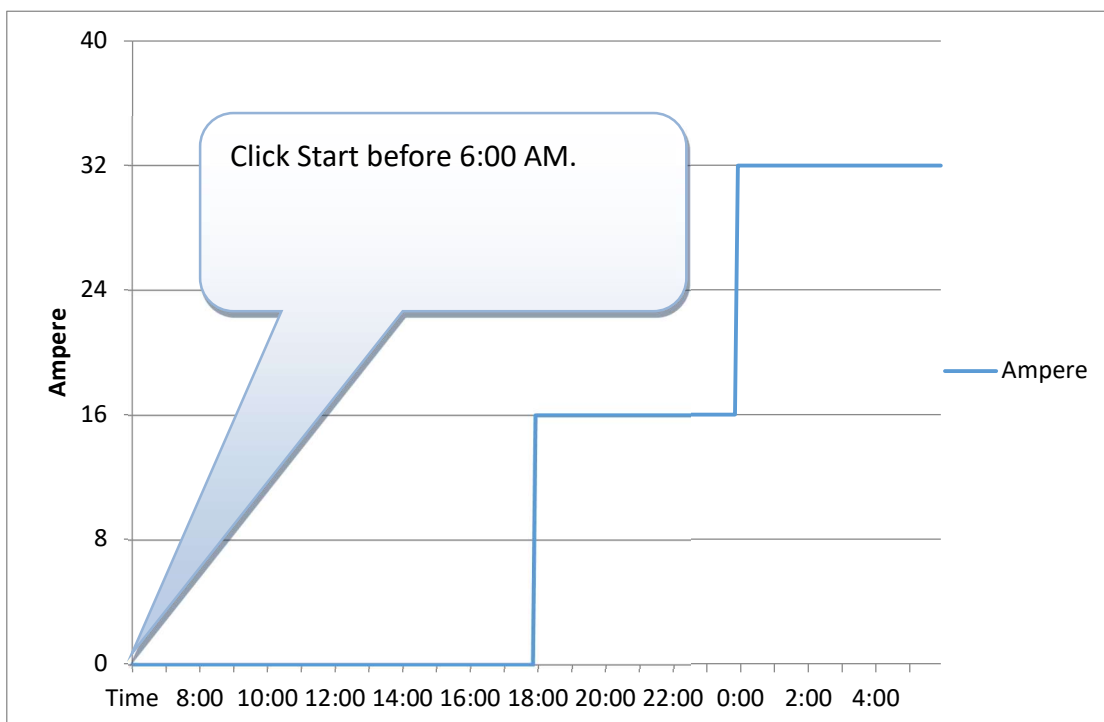

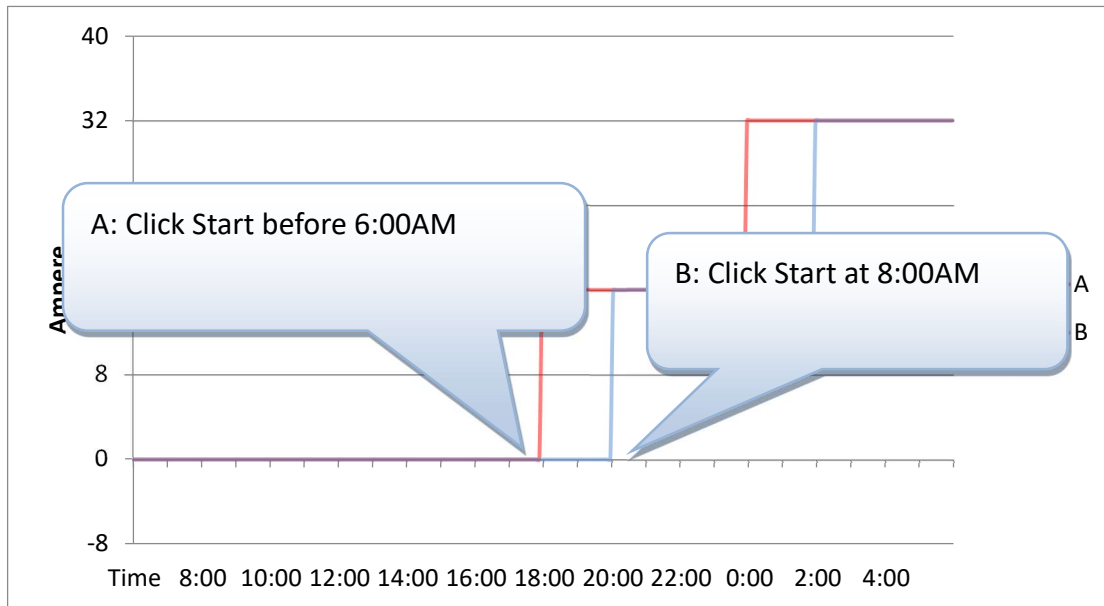

3. Recurring

The loop execution can be set to cycle by day or cycle by week.

Example:

You want to charge from 8pm to next day 6pm on Mondays to Fridays, and all day on Saturdays and Sundays. We can set to two Recurring tasks.

The first task:

<
Schedule Setting
Submit

→
Relative
Recurring

Start Time
Tue, Oct 23, 2018 12:00 AM

End Time
Fri, Nov 23, 2018 12:00 AM

Priority Setting 5 >

Recurring Kind Week(Start From Monday) >

After Monday 00:00:00 Bypass >

After Monday 18:00:00 32.0A >

After Tuesday 06:00:00 Bypass >

After Tuesday 18:00:00 32.0A >

After Wednesday 06:00:00 Bypass >

After Wednesday 18:00:00 32.0A >

After Thursday 06:00:00 Bypass >

After Thursday 18:00:00 32.0A >

After Friday 06:00:00 Bypass >

After Friday 18:00:00 32.0A >

After Saturday 06:00:00 Bypass >

+

The second task:

<
Schedule Setting
Submit

→
Relative
Recurring

Start Time
Tue, Oct 23, 2018 12:00 AM

End Time
Fri, Nov 23, 2018 12:00 AM

Priority Setting 1 >

Recurring Kind Week(Start From Monday) >

After Monday 00:00:00 Bypass >

After Saturday 00:00:00 32.0A >

<
Schedule

Recurring ↑ Priority: 1 >

Tue, Oct 23, 2018 12:00 AM

Fri, Nov 23, 2018 12:00 AM

Delete

Recurring ↑ Priority: 5 >

Tue, Oct 23, 2018 12:00 AM


Fri, Nov 23, 2018 12:00 AM

Delete



Add New Schedule Profiles

5. IC-Card Management System


For mobile phones that support NFC, special IC CARDS can be added to the IC card management system of the APP. The IC card's ID, effective time, maximum power and among them, the maximum available power information is stored on IC card. The other information is stored in the cache of charger.

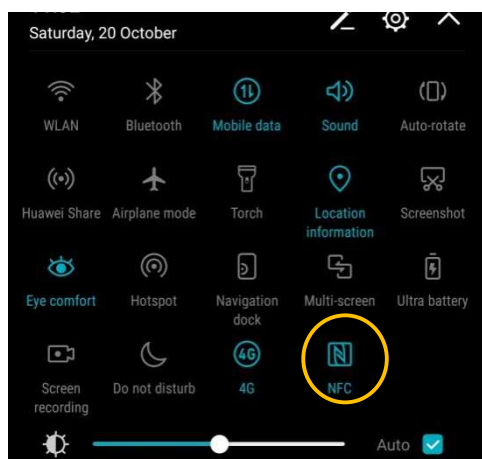


Please turn on the NFC switch on your phone. The APP will apply for the NFC usage authorization. Please click the permission, otherwise the IC card cannot be added.

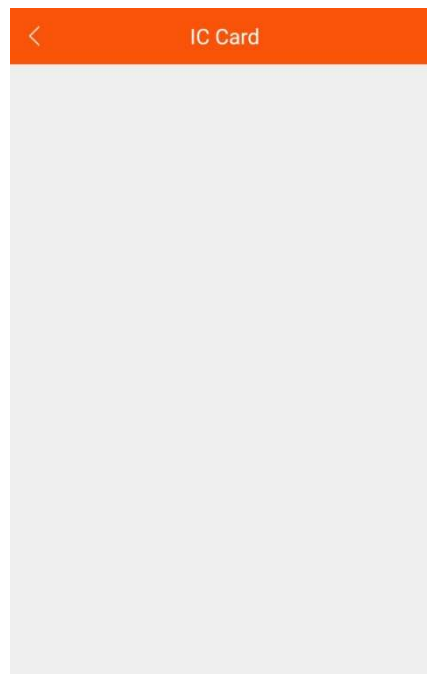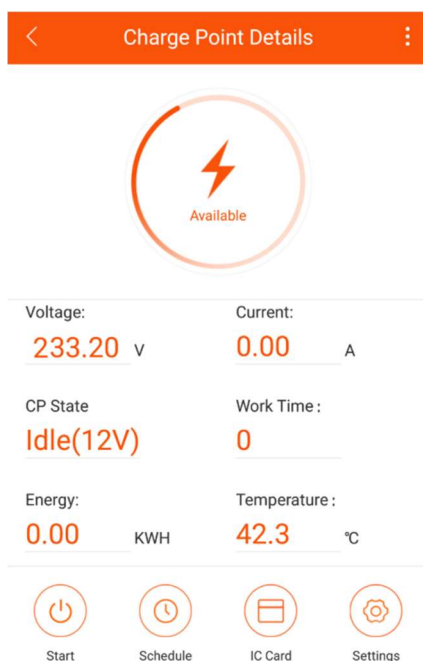

Drücken Sie auf “IC-Karte”, um in die Einstellungszeit der IC-Karte zu gelangen.

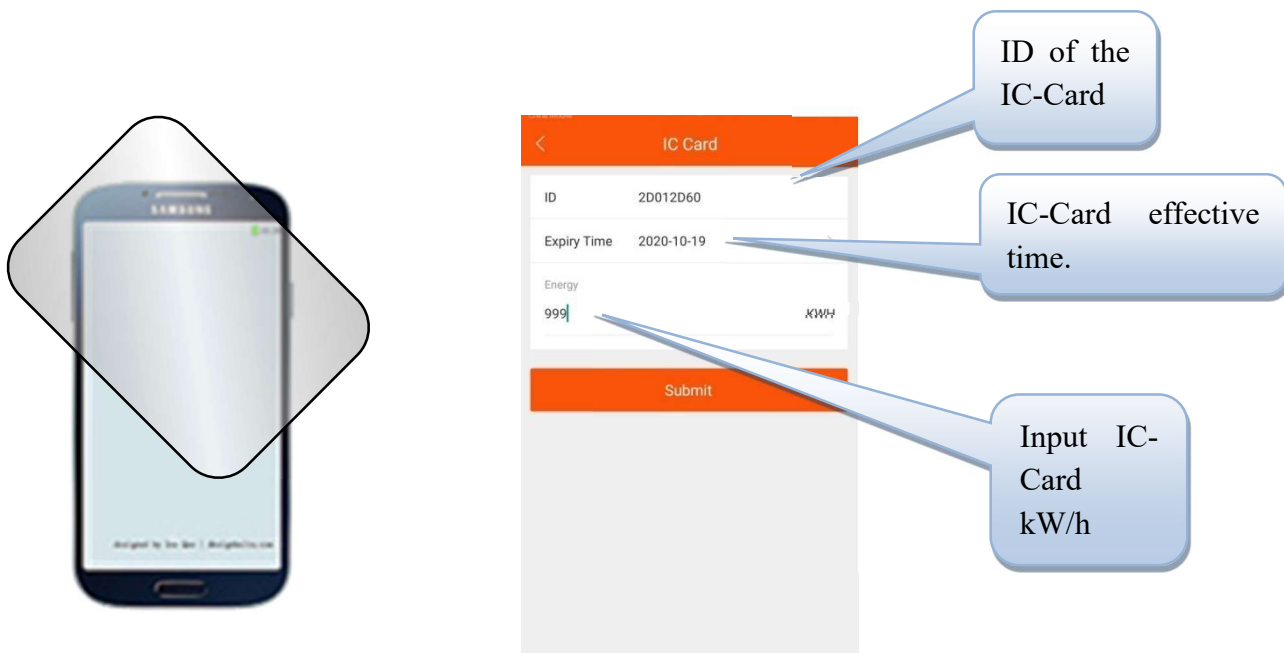

Place the IC card that needs to be added near the NFC module of the phone. After reading the information of IC card, the setting window will pop up. Set the kWh and click ok to add. If there is no response, please change a few more areas to stick, or ask the mobile phone manufacturer to confirm the location of the NFC module.

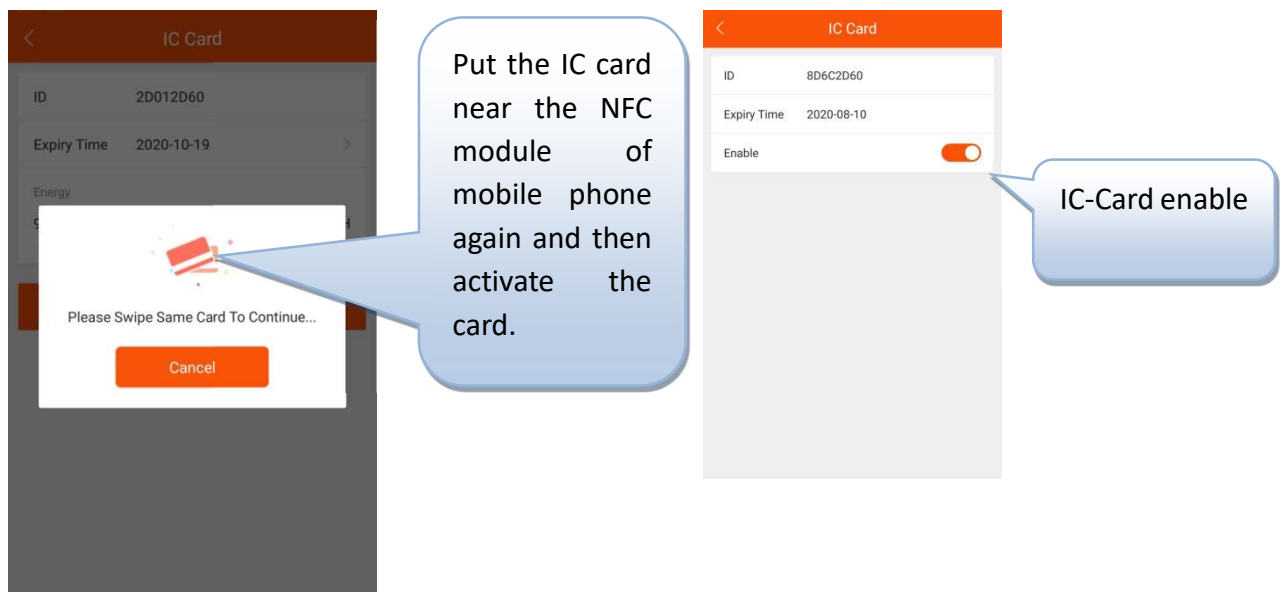

1. The charger owner use the APP to issue the cards to the user according to the user's demand, and sets the kWh limit of IC card according to the need.
2. The owner of the EV Charger decides which chargers can be used and which chargers can not be used for the IC card set (all Settings are for offline storage, the electricity information is saved on the IC card, and the authentication information is saved on the charger).
3. Please use the specified IC card to the corresponding charger, and the card starts charging. When the charge is completed, the charge can be stopped by swiping the card again. If you don't want to charge, you can cancel the current charge by simply swiping the card.
4. When charging is completed, the user needs to swipe the card to end the charging, and the charged kWh on the card will be deducted from the charging process.
5. When the balance of kWh on the card is insufficient, the user needs to ask the owner to add the kWh power.

Note: Under this mode, the charger can not be open "Plug then charge mode" and the "Stop transaction on EV side disconnect" function can not be stopped by pulling the connector.



6. Charger Status

There are 9 states of chargers. The current status information will be displayed on the corresponding screen. Here is an explanation of 9 working states:

Name	explanation
Unavailable	The charger is in an unusable state, under which the charger cannot be charged: <ol style="list-style-type: none">1. Charger is unavailable after power on, and needs to be activated by mobile APP.2. In the upgrade state, WIFI will be switched to unavailable.
Available	The charger is in an idle state, in which the user can operate the charger.
Preparing	The charger is in the state of preparing charging. The following situations will trigger the charger to enter the state of preparation. If the charger enters the state of preparation without charging, it will return to the state of availability or charging completion after timeout: <ol style="list-style-type: none">1. The charger will enter the preparation state when the charger is inserted, but it still needs user authentication to start charging (except the open plug-in and charging mode). The timeout period for the plug-in waiting for authentication is 120 seconds, which can be configured in the APP;2. The phone will start charging remotely. If the user does not have in the plug, than it will wait for the user to put it in;3. Swiping the card when no plug inserted into the vehicle.
Charging	When all charging conditions are met, the charger will enter the charging state.

SuspendedEVSE	<p>When the working conditions of the charger are not satisfied, the charger will enter the state of SuspendedEVSE, and SuspendedEVSE will be triggered in various cases::</p> <ol style="list-style-type: none"> 1. The Charger enters protection conditions, such as over voltage, over current, over temperature, leakage, emergency stop, etc.; 2. In the charging process, the scheduling condition is not satisfied, resulting in the active suspension of SuspendedEVSE.
SuspendedEV	SuspendedEV mainly occurs when the S2 switch of the EV is not closed.
Finishing	<ol style="list-style-type: none"> 1. In the state of preparation, the charger will enter the state of charging completion if the plug is inserted and the device has timed out; 2. The charging state will be entered after charge finished
Reserved	No support, not applicable to current charger.
Faulted	Charger error occurred.

7. Settings

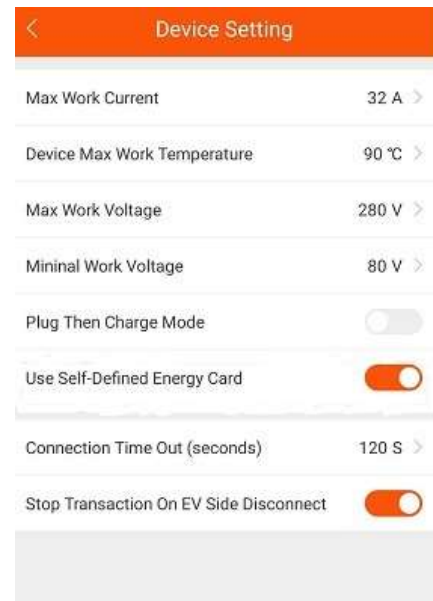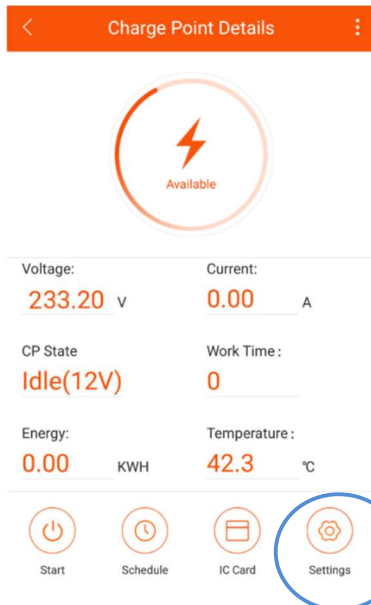

Maximum working current: Sets the maximum working current of the charge point, which is globally effective. If the current value of the dispatching setting is greater than this value, it will be subject to the current value.

Maximum operating temperature: the maximum operating temperature of the charge point is set.

Maximum working voltage: set the maximum working voltage of the charge point.


Minimum working voltage: set the minimum working voltage of the charge point

Enable the Plug then charge mode.


Enable the IC card management system.

Timeout of charge insertion: timeout of charger readiness.

Disconnection of the car terminal stops the charging transaction: if it is on, it will not start charging automatically after pulling the plug out or the car stops charging.

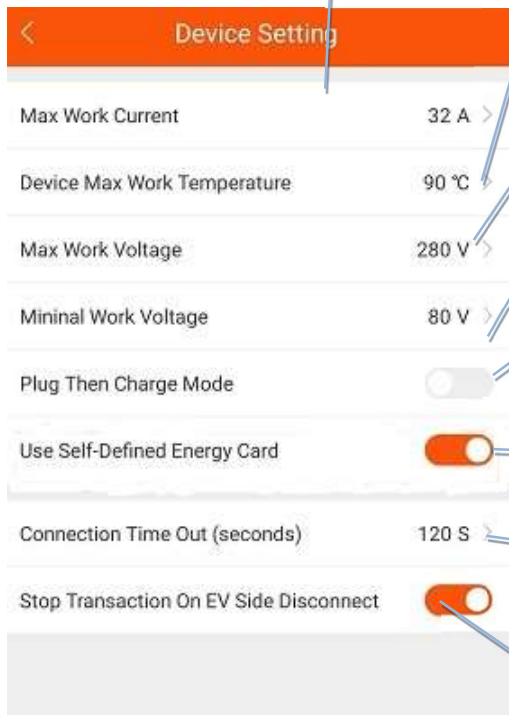


8. Firmware Upgrade

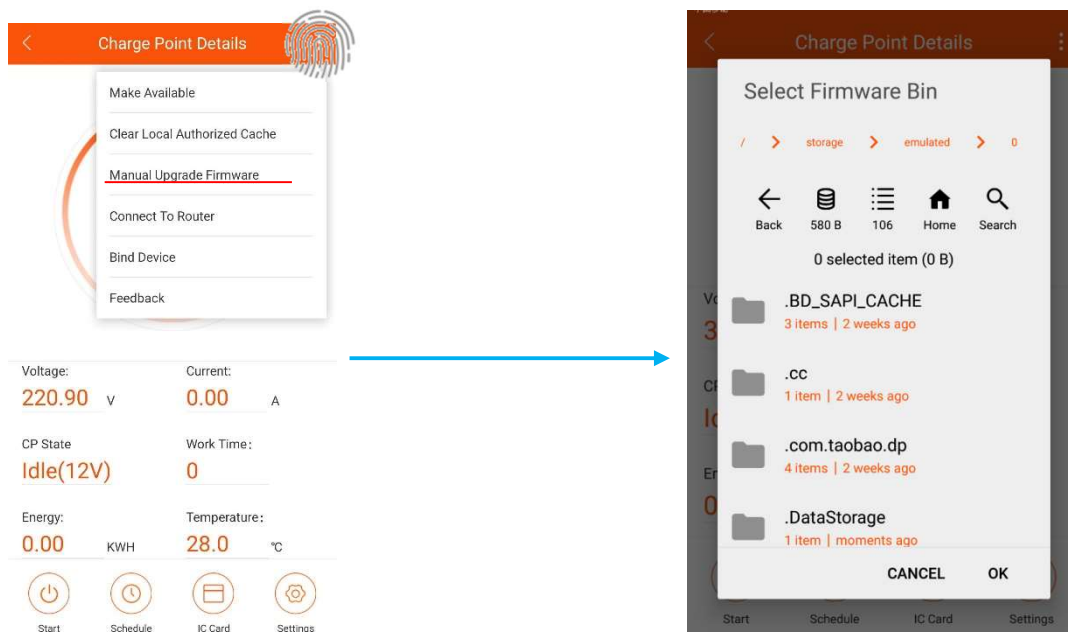


Here you can upgrade the software inside the charger.

9. Router Connection

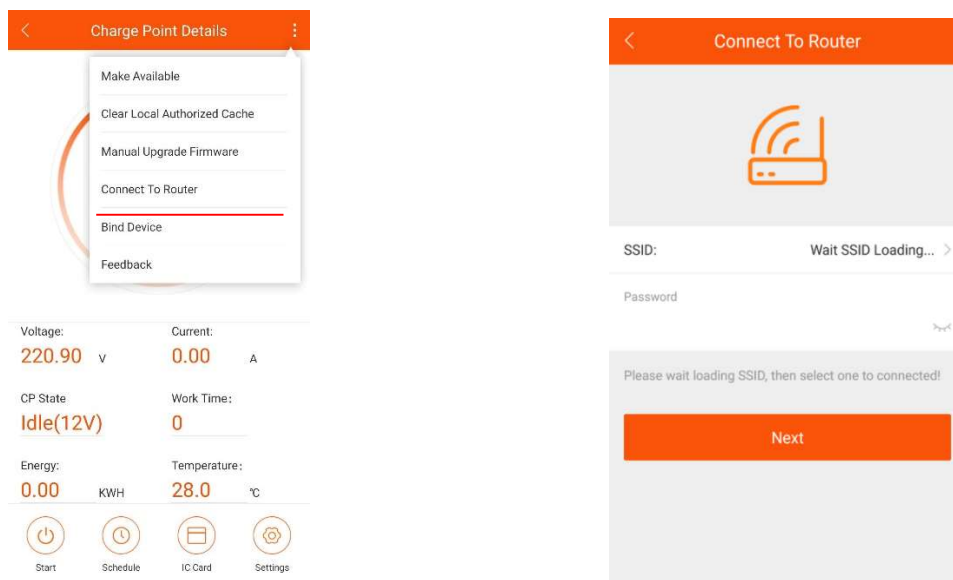

You can set up the charger to connect to a designated router. Press “to connect to the router”, and wait for about 10 seconds, then choose router name (SSID) and password. The charger will restart after the setting. Then connect the phone to the router and enter the APP again. You can control the charger within the same network.

10. Bind Device

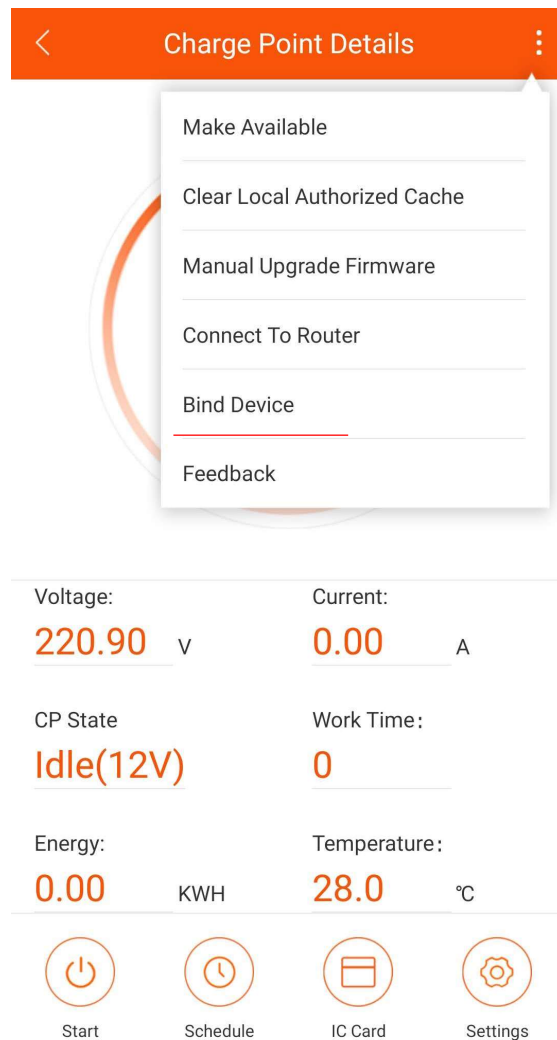

You can control the charger anywhere when it is bound.

Note: The charger needs to connect to router before binding, and the router needs to connect to internet.